


PROTORQUE[®] RCD PRESS

The RCD Press installs or removes a RCD Head offline, on the ground before drilling begins. This step reduces any inline time or hazards on the rig floor that might be normally seen with an inline installation. The RCD Assembly is then simply lifted to the rig floor, made-up and ran as if it were a normal joint. As such, the installation process and the removal process with the RCD Press is safer and faster than that on the rig floor, this inline time savings equates to more productive rig time and a seamless operation, reducing steps along the way.

REDEFINE TRS[™]

● **RUGGED DESIGN
ALLOWS FOR
MAXIMUM
PORTABILITY**

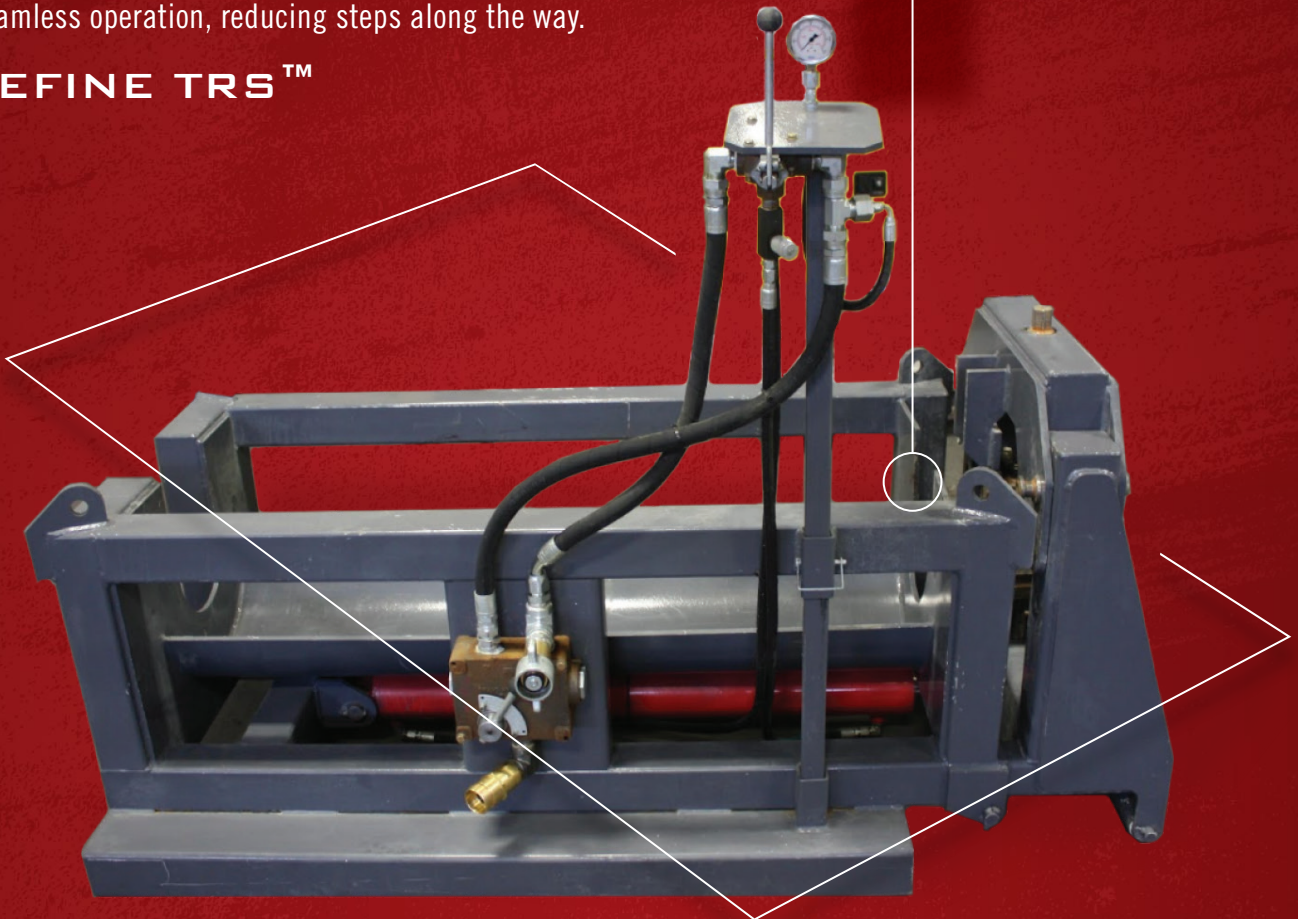

CANADA
780.933.0404

UNITED STATES
713.300.5216



PROTORQUE[®] RCD PRESS



SPECS

- **TUBULAR RANGE:** 3.5"-7 5/8" OD
- **HYDRAULIC NEEDS:** 20-60 GPM system
- **WEIGHT:** 950 lbs Total Weight
- **DIMENSIONS:** 72" Long 30" High 37" Wide

53" OAL RCD Capable
20" OD Max RCD Capable
36" Installation Stroke

CANADA
780.933.0404

UNITED STATES
713.300.5216

