


PROTORQUE BUCKING FRAME

The Bucking Frame, when coupled with any power tong, can be used for making and breaking out threaded connections. The compact footprint can be utilized in even the most remote locations and it safely assembles and disassembles connections for casing accessories (float shoe / collar), pups, hangers and many other threaded tools.

REDEFINE TRS™

- ADAPTERS FOR ALL MAKES AND MODELS OF POWER TONGS
- COMPACT FOOTPRINT FOR USE ON ANY SITE

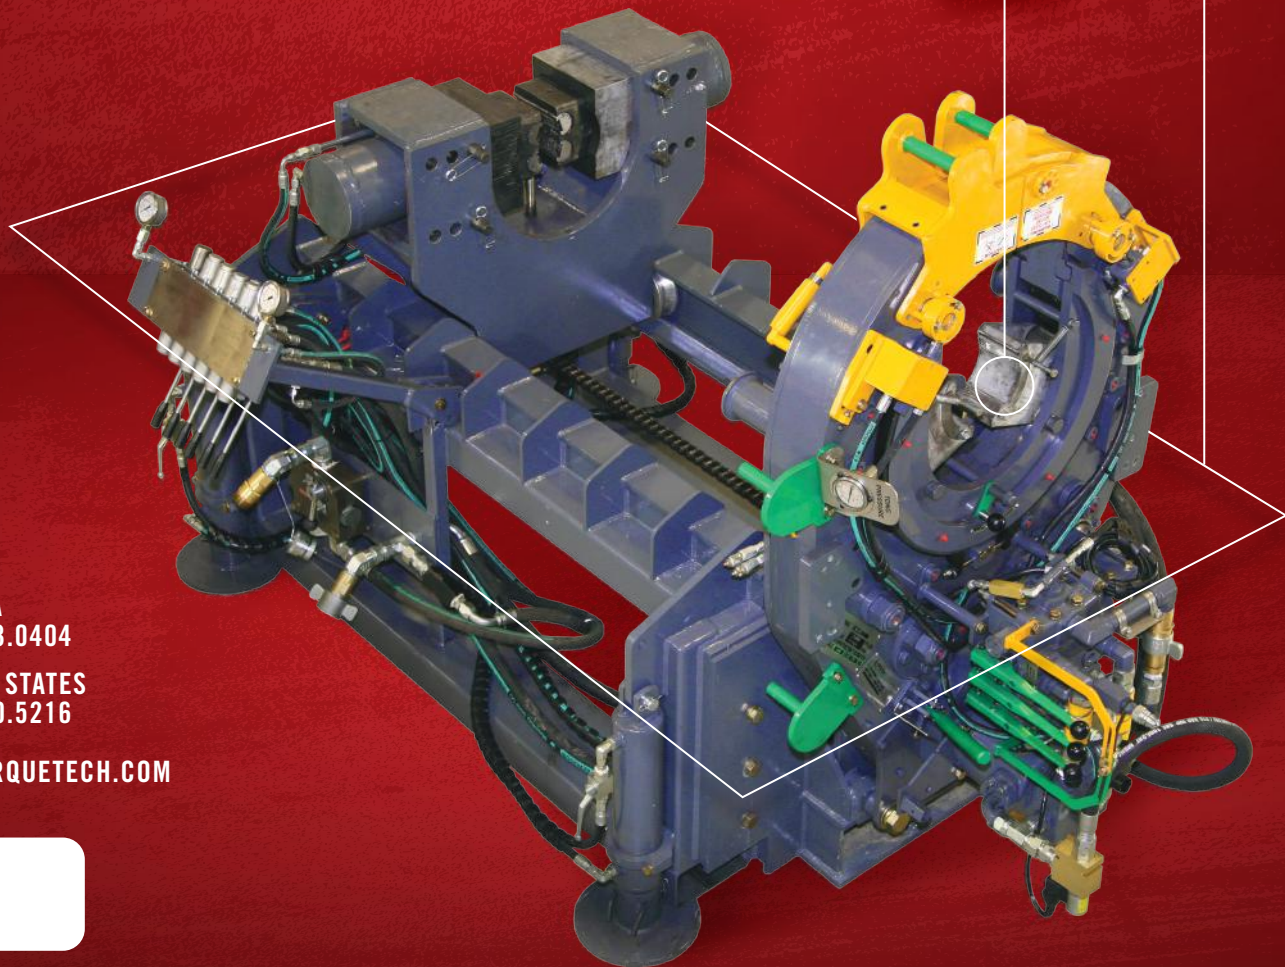


CANADA
780.933.0404

UNITED STATES
713.300.5216

PROTORQUETECH.COM



PROTORQUE BUCKING FRAME

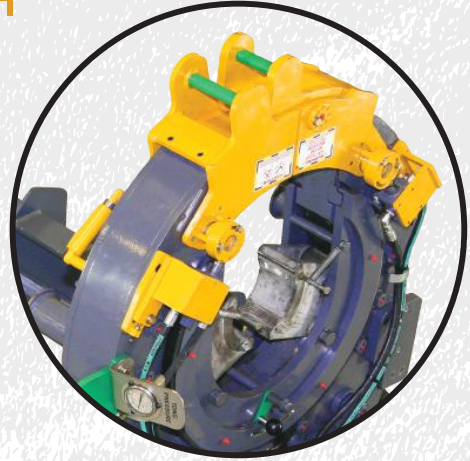

SPECIFICATIONS

- **PIPE SIZE RANGE:** Power Tong 4.5 – 13.63" (114.3 – 346 mm)
Back-up jaw 4 – 15" (101.6 – 381 mm)
- **TORQUE RANGE:** 4.5 – 5.5" (114.3 – 139.7 mm) 25,000 ft/lbs (33,850 Nm)
7 – 13.63" (177.8 – 346 mm) 35,000 ft/lbs (47,400 Nm)
- **FLOW RATING:** 40 – 60 GPM (152 – 227 LPM)
- **WEIGHT:** 4,500 lbs (2045 kg)
- **DIMENSIONS:** Length 95" (2,413 mm), Width 58" (1,473 mm), Height 68" (1,727 mm)
- **HEIGHT ADJUSTMENT:** 12" (305 mm)
- **BACK-UP JAW ADJUSTMENT (SCOPE):** Maximum 52" (1,321 mm) Minimum 9" (229 mm)

All specifications are power tong dependent

CANADA
780.933.0404

UNITED STATES
713.300.5216

PROTORQUETECH.COM



FEATURES:

Adjustable Back-ups

Reduces hazards and NPT on the rig floor

Inline time savings equates to more productive rig time & seamless operation