


# PROTORQUE LOAD TEST FRAME

The Load Test Frame was designed for testing Casing Running Tools (CRT), overhead equipment, rotary shoulder and API threaded connections. The frame is load rated up to 750 tons, providing certified proof tests up to 500 tons. The adjustable horizontal bed can accommodate various drilling tools within the industry. The two ton overhead jib crane and rolling bed trolleys allow us to safely hoist, install and handle the most challenging tools.

- HORIZONTAL ADJUSTABLE BED

REDEFINE TRS™

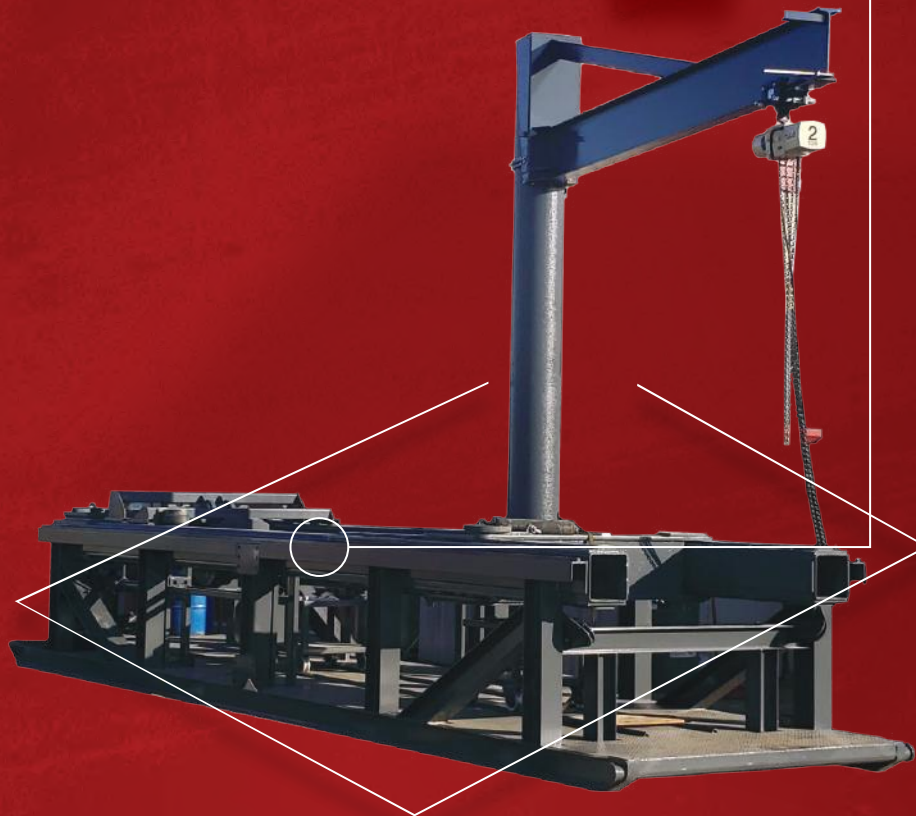

CANADA  
780.933.0404

UNITED STATES  
713.300.5216

PROTORQUETECH.COM



# PROTORQUE LOAD TEST FRAME



## SPECIFICATIONS

- **TEST BED LENGTH:** 18' (5.5 m)
- **TEST WIDTH:** 5.3' (1.6 m)
- **OVERHEAD HOIST CAPACITY:** 2 ton overhead jib crane
- **OVERHEAD HOIST HEIGHT:** 13' (5.9 m)
- **JIB MOVEMENT:** 190 degrees
- **THREAD CAPABILITY (ROTARY SHOULDER):** 4.5" IF (114.3 mm) & 6.63" Reg (168.3 mm)
- **EQUIPMENT CAPABILITIES:** Bails (extension & links), Elevators (square shoulder & casing), CRTi & CRTe / specialty threads & equipment available upon request
- **DIMENSIONS:** Length 32' (9.8 m), Width 10' (3 m), Height 18' (5.5 m)
- **WEIGHT:** 36,000 lbs (16,400 kg)
- **TEST CAPACITY:** 750 ton (500 ton proof load test)

CANADA  
780.933.0404

UNITED STATES  
713.300.5216

PROTORQUETECH.COM



### FEATURES:

Horizontal bed allows for easy installation and efficient tool change over

The overhead jib crane reduces lifting and handling hazards

CRT testing available upon request